

SENSIDYNE®

2 WIRE ISOLATOR

User Manual

Document No. 360-0121-01
(Revision A)




SENSIDYNE®


Sensidyne, LP. • 16333 Bay Vista Drive
Clearwater, Florida 33760 USA
800-451-9444 • +1 727-530-3602 • +1 727-539-0550 [fax]
web: www.sensidyne.com • e-mail: info@sensidyne.com

Sensidyne 2-Wire Isolator - Ref 821-0224-01

Wiring Diagram

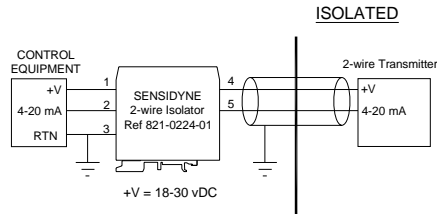

Manufactured by Sensidyne, LP • Clearwater, FL USA
800-451-9444 • 727-530-3602

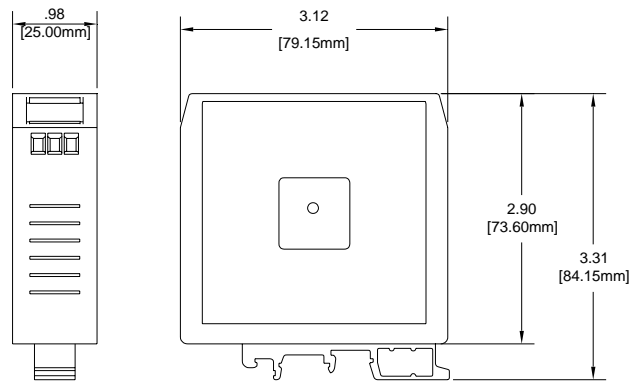

Mounts to standard 15mm, 35mm, or 32mm (G form) DIN Rail

CAUTION - DO NOT SHORT ISOLATED V+ AND 4-20mA WIRES
INPUT VOLTAGE 18-30 VDC
INPUT CURRENT 125 mA MAX, 75 mA Nominal @ 24 VDC

SENSIDYNE®

Sensidyne, LP. • 16333 Bay Vista Drive
Clearwater, Florida 33760 USA
800-451-9444 • +1 727-530-3602 • +1 727-539-0550 [fax]
web: www.sensidyne.com • e-mail: info@sensidyne.com



ISO 9001:2000 Registered